


320 Foot Valve Extractor

The 320 foot valve extractor is designed for use with the 150 and 156 1-1/2" foot valves. This 20 lb. extractor valve provides a means to remove foot valves easily from underground storage tanks for cleaning or servicing. The 320 foot valve extractor is gasket sealed to prevent loss of prime caused by air being sucked in through the top fitting.

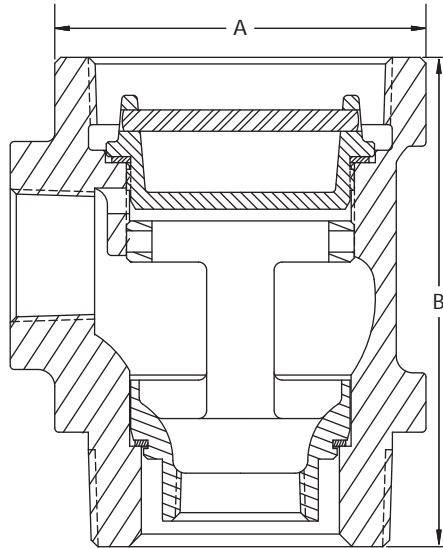

Materials

- Body: zinc plated cast iron.
- Cap: bronze.
- Suction stub adapter: bronze.
- Gasket: leather.

Model	Size		A		B	
	In.	mm	In.	mm	In.	mm
320-302-01	4.00 × 4.00 × 1.50	102.00 × 102.00 × 38.00	5.50	139.70	7.25	184.15
320-302-02	4.00 × 4.00 × 2.00	102.00 × 102.00 × 51.00	5.50	139.70	7.25	184.15

Thread Size

Model	Inlet Female Thread		Inlet Male Thread		Outlet Thread		Top Thread	
	In.	mm	In.	mm	In.	mm	In.	mm
320-302-01	1.50	38.00	4.00	102.00	1.50	38.00	4.00	102.00
320-302-02	1.50	38.00	4.00	102.00	2.00	51.00	4.00	102.00

Replacement Parts

Model	Description
320-102-01	Suction stub adapter
320-103-01	Cap assembly
321-100-01	Extractor wrench
320-104-01	Kit - cap with gasket

